

GEBERIT

SIGMA01 MECHANICAL BUTTON ACCESS PLATE







Mechanical Front press Service through the button

SPECIFICATIONS	
Recommended use	Domestic, hotel and commercial
Material	ABS
Colour Availability	Bright Chrome, Satin Chrome, White, Black
Application	Dual-flush Access Plate
Compatibility	Sigma8 Cistern
Operation	Mechanical, front press in wall Top/Front UC
Actuation Force	< 20N
Spare Parts	Guarantee of availability for 25 years
Technical Support	1800 Geberit











Sigma01 D/F Chrome Sigma01 D/F Satin Sigma01 D/F White Sigma01 D/F Black

CLEANING INSTRUCTIONS

You have selected a Geberit product with a high-grade surface. Please follow the cleaning instructions so that your Geberit product will give you many years of pleasure.

Never use aggressive cleaners that contain chlorine, are acidic, abrasive or corrosive.

Only use water and a mild cleaning agent.

- 1. Clean the unit with a soft cloth soaked in water.
- 2. Dry with a soft cloth.


Damage caused by any improper treatment is not covered by the product warranty. Refer to warranty Conditions.


Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.





SIGMA01 MECHANICAL BUTTON/ACCESS PLATE


INSTALLATION INSTRUCTIONS




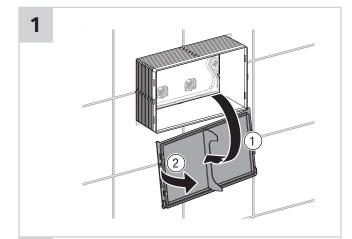
















■ GEBERIT

SIGMA01 MECHANICAL BUTTON/ACCESS PLATE

INSTALLATION INSTRUCTIONS

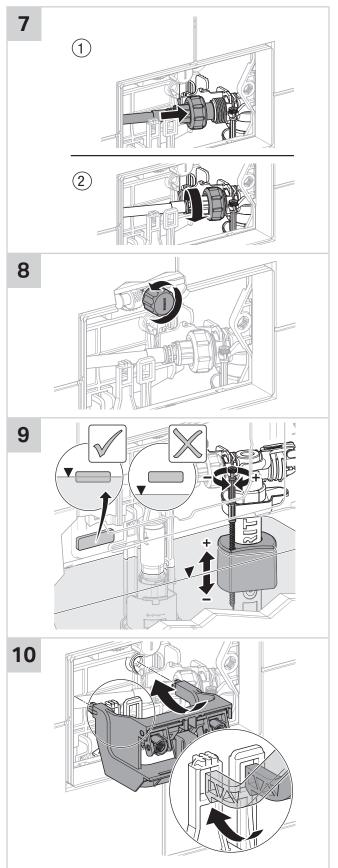

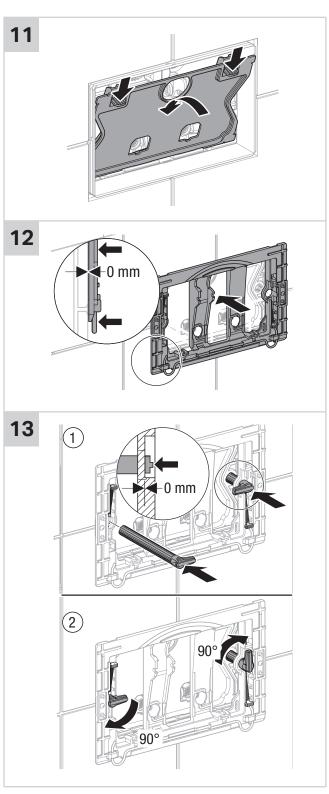

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference



SIGMA01 MECHANICAL BUTTON/ACCESS PLATE

INSTALLATION INSTRUCTIONS

